


## Minibar installation instruction

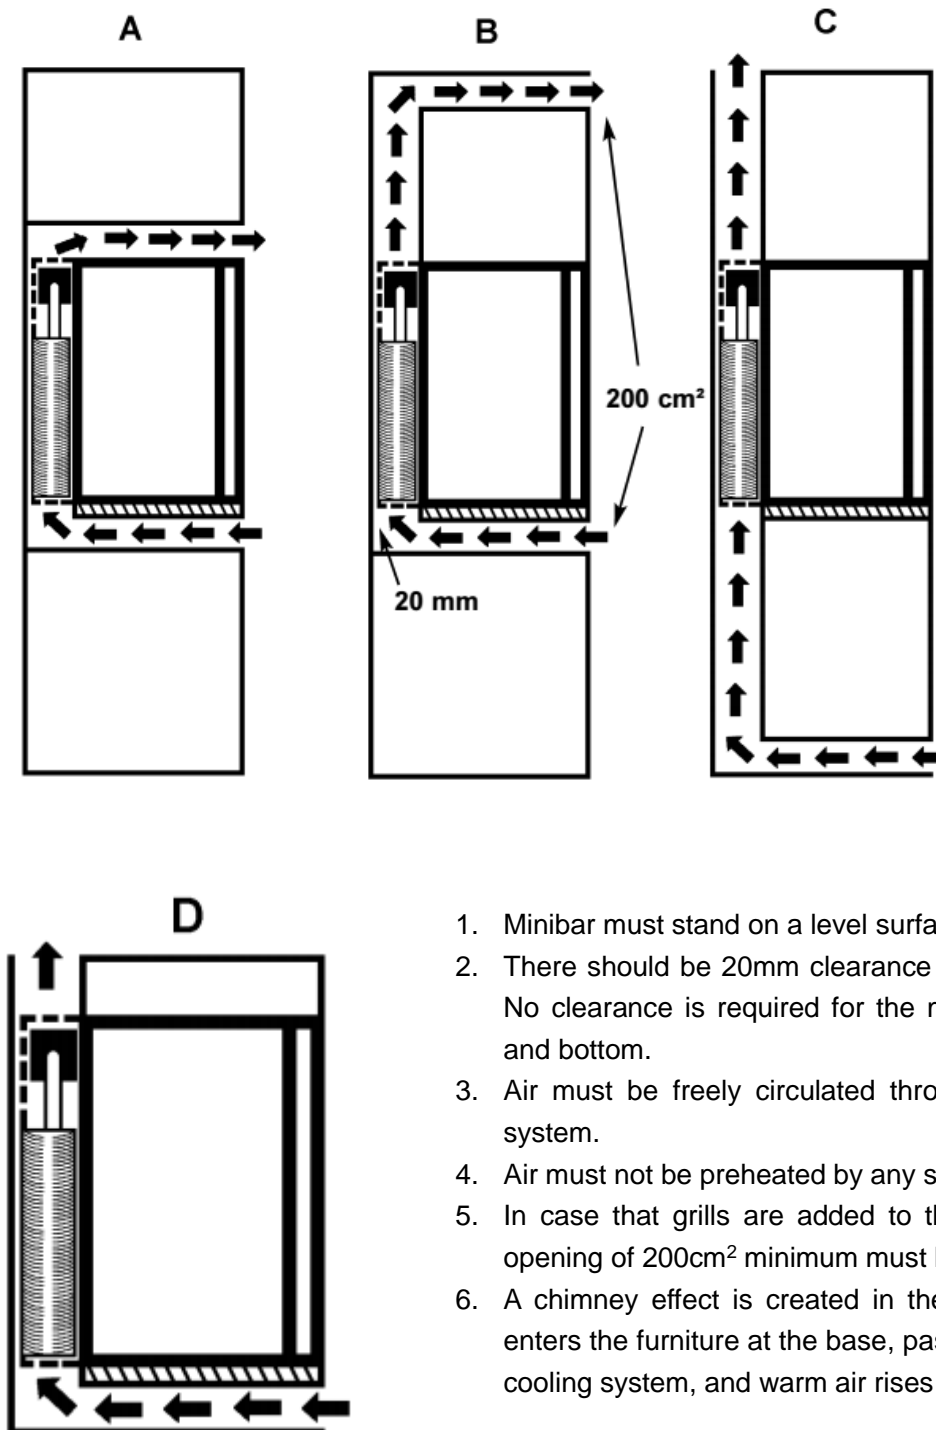

1. Minibar must stand on a level surface.
2. There should be 20mm clearance to the rear wall. No clearance is required for the minibar top, side and bottom.
3. Air must be freely circulated through the cooling system.
4. Air must not be preheated by any source of heat.
5. In case that grills are added to the air in or out, opening of 200cm<sup>2</sup> minimum must be assured.
6. A chimney effect is created in the back. Cold air enters the furniture at the base, passes through the cooling system, and warm air rises and escapes.