

BAR FRIDGES

Cooling the Beers of a Nation *Australia*

Bringing the worlds best chillers to Australia

MODEL: SG2H-B

QUICK INFO

Double Door Commercial Under Bench Bar Fridge.

Units encompass the best brand name parts available in the world, designed by the best engineers and built by a quality long term manufacturer, to bring a reliable product to the market.

Polished stainless steel inner, LG compressor, LOW E glass, lock and German EBM fans make unit robust for tough conditions.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- LG Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



SPECIFICATIONS

Capacity (litres)	208
Holds (cans)	240
Noise Level	47
Consumption	1.47Kwh/24Hrs
Unit dimensions (WxDxH)	900 x 500 x 840
Lockable	Yes
Gross weight	69 kg


**Specifications and price of this product may change at any time

**For more information about this product please call us or visit our website.


www.rhinoequipment.eu

PRODUCT INFORMATION

SG2H-B

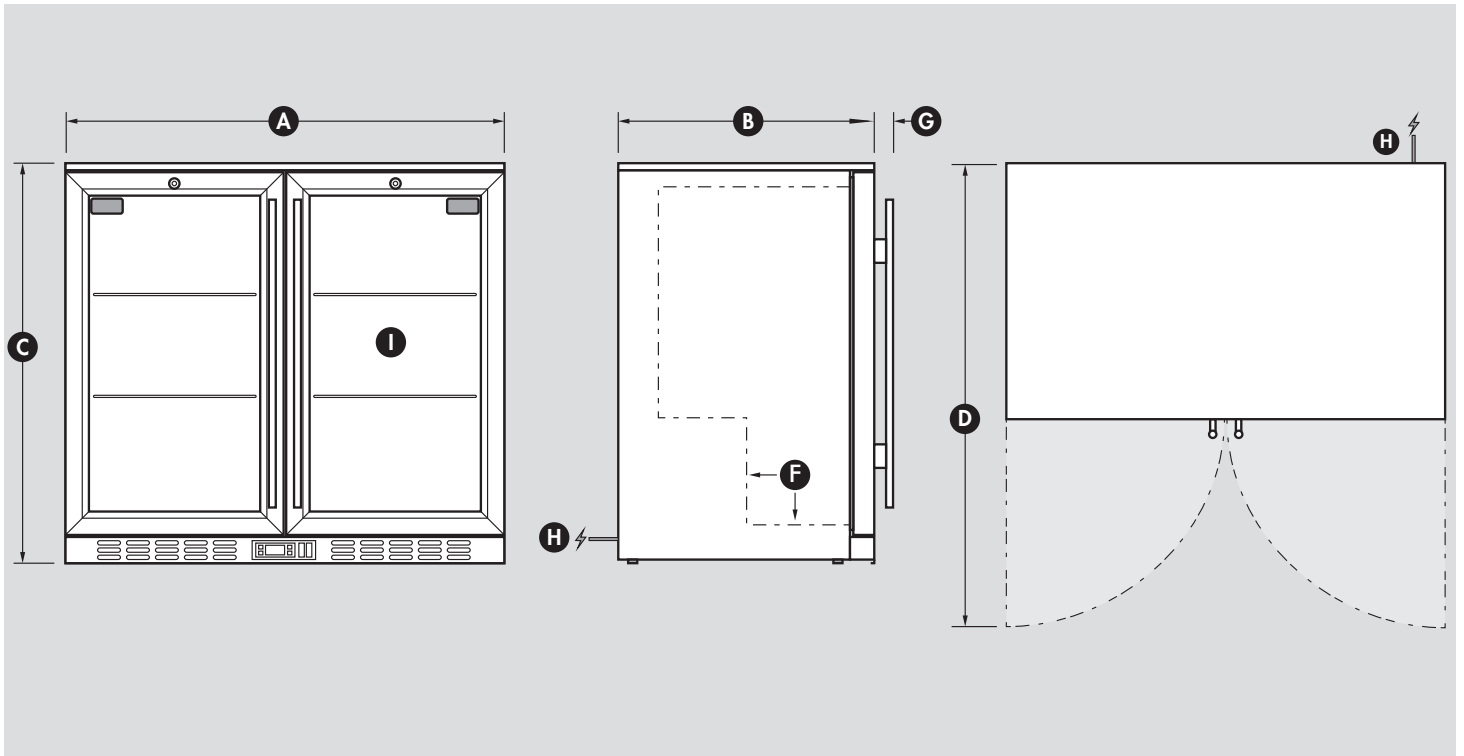

INFORMATION

DIMENSIONS

Ⓐ	Overall width	900mm
Ⓑ	Overall depth	495mm
Ⓒ	Overall height - includes feet	840mm
Ⓓ	Overall depth with door open	915mm
Ⓔ	Height of hinge cap (included in height above)	N/A
Ⓕ	Internal step inside unit	190mm In & 190mm High
Ⓖ	Depth of handle (adds to depth above)	40mm
Ⓗ	Power cord location & length	1800mm
Ⓘ	Internal dimensions (WxDxH)	820 x 380 x 680mmH

Note: Door opens maximum 5mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 920 x 600 x 850mmH Front
Venting type of fridge Venting, Through Grill

****Note: If wanting a 'cabinet door' in front of fridge door please contact us****

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	445 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	4 x (395mmW x 345mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temperature	38oC
Outdoor official IP rating	IP22
Meps Energy Approved & Food Grade	Yes